

Research Article

Structural Diagram of Piezodrive for Nanotechnology and Medical Science

Afonin S.M.*

National Research University of Electronic Technology, MIET, Moscow, Russia

Abstract

The piezodrive is used for nanotechnology, medical science and precision engineering in adaptive optics, scanning microscopy for research DNA. The structural diagram of the piezodrive for nanotechnology, medical science, and precision engineering is determined with using the equation of the linear ordinary second-order differential equation and the equation for the reverse piezoeffect. The matrix transfer function of the piezodrive is obtained. The block diagrams of the piezodrive are determined for distributed and lumped parameters.

Introduction

Piezodrives are used in precision engineering, aerospace, machining, adaptive optics for optical manipulation, nano displacement for precision manipulation in medical science and nanotechnology [1]. The piezodrive is actuated precision mechatronics system and transfer electrical energy to mechanical energy. This piezodrive is used in scanning microscopy in nanotechnology and medical science for research on DNA [1-18]. With use physical mathematical method the structural diagram is obtained for the piezodrive. The structural diagram of the piezodrive is determined the transformation of electrical energy into mechanical energy in difference from Mason's and Cady's circuits [5-36]. The structural diagram of the piezodrive is determined with using the equation of the linear ordinary second-order differential equation and the equation for the reverse piezoeffect [37-65]. From the set of the equations for the structural diagram its matrix transfer function is obtained.

Structural diagram

The piezodrive is calculated for nanotechnology, medical science, and precision engineering by physical mathematical method with used to construct the diagram of the piezodrive from the equations of the linear ordinary second-order and the reverse piezoeffect. The equation of the reverse piezoeffect has the form [1-18].

$$S_i = s_{ij}^{\Psi} T_j + v_{mi} \Psi_m$$

Here S_i, T_j - the relative deformation and the mechanical stress, $s_{ij}^{\Psi} = \begin{cases} s_{33}^E, s_{11}^E, s_{55}^E \\ s_{33}^D, s_{11}^D, s_{55}^D \end{cases}$ the elastic compliances, $v_{mi} = \begin{cases} d_{33}, d_{31}, d_{15} \\ g_{33}, g_{31}, g_{15} \end{cases}$ the piezoelectric constant, $\Psi_m = \begin{cases} E_3, E_3, E_1 \\ D_3, D_3, D_1 \end{cases}$ the control parameter: E - electric field strength, D - the electric induction, y - the coefficient of wave propagation, $i = 1, 2, \dots, 6, j = 1, 2, \dots, 6, m = 1, 2, 3$.

The second-order linear ordinary differential equation of the piezodrive [1-18] has the form

$$\frac{d^2 \Xi(x, p)}{dx^2} - \gamma^2 \Xi(x, p) = 0$$

with its solution

$$\Xi(x, p) = Ce^{-\gamma x} + Be^{\gamma x}$$

$$C = (\Xi_1 e^{-\gamma l} - \Xi_2) / [2 \operatorname{sh}(\gamma l)], B = (\Xi_2 - \Xi_1 e^{-\gamma l}) / [2 \operatorname{sh}(\gamma l)],$$

here $\Xi(x, p)$ - the Laplace transform of the displacement; x - the coordinate; p - the operator.

For two faces we have the equations of the forces

$$T_j(0, p) S_0 = F_1(p) + M_1 p^2 \Xi_1(p) \text{ for } x = 0$$

$$T_j(l, p) S_0 = F_2(p) + M_1 p^2 \Xi_2(p) \text{ for } x = l$$

and the equations of the mechanical stresses on two faces

More Information

***Corresponding author:** Afonin S.M., National Research University of Electronic Technology, MIET, Moscow, Russia Email: learner01@mail.ru

ID <https://orcid.org/0000-0002-7750-8553>

Submitted: May 05, 2026

Accepted: May 14, 2026

Published: May 15, 2026

Citation: Afonin S.M. Structural Diagram of Piezodrive for Nanotechnology and Medical Science. Ann Biomed Sci Eng. 2026; 10(1): 13-17. Available from: <https://dx.doi.org/10.29328/journal.abse.1001036>

Copyright license: © 2026 Afonin S.M. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Keywords: Structural diagram; Piezodrive; Distributed and lumped parameters; Nanotechnology; Medical science; Precision engineering



$$T_j(0, p) = \frac{1}{s_{ij}^{\psi}} \frac{d\Xi(x, p)}{dx} \Big|_{x=0} - \frac{v_{mi}}{s_{ij}^{\psi}} E_m(p);$$

$$T_j(l, p) = \frac{1}{s_{ij}^{\psi}} \frac{d\Xi(x, p)}{dx} \Big|_{x=l} - \frac{v_{mi}}{s_{ij}^{\psi}} E_m(p)$$

and the structural diagram of the piezodrive on Figure 1

$$\Xi_1(p) = \left[\frac{1}{(M_1 p^2)} \right] \left\{ \begin{array}{l} -F_1(p) + (1/\chi_{ij}^0) \\ \times [v_{mi} \Theta_m(p) - [\gamma / \text{sh}(\gamma l)] [\text{ch}(\gamma l) \Xi_1(p) - \Xi_2(p)]] \end{array} \right\},$$

$$\Xi_2(p) = \left[\frac{1}{(M_2 p^2)} \right] \left\{ \begin{array}{l} -F_2(p) + (1/\chi_{ij}^0) \\ \times [v_{mi} \Theta_m(p) - [\gamma / \text{sh}(\gamma l)] [\text{ch}(\gamma l) \Xi_2(p) - \Xi_1(p)]] \end{array} \right\},$$

Here $\chi_{ij}^{\psi} = S_{ij}^{\psi} / S_0$

From the structural diagram on Figure 1 we have the matrix transfer function.

$$\begin{pmatrix} \Xi_1(p) \\ \Xi_2(p) \end{pmatrix} = \begin{pmatrix} W_{11}(p) & W_{12}(p) & W_{13}(p) \\ W_{21}(p) & W_{22}(p) & W_{23}(p) \end{pmatrix} \begin{pmatrix} \Psi_m(p) \\ F_1(p) \\ F_2(p) \end{pmatrix}$$

Results and discussion

The static displacements of the longitudinal piezodrive at inertial load are obtained in the form

$$\xi_1(\infty) = d_{33} U (M_2 + m/2) / (M_1 + M_2 + m),$$

$$\xi_2(\infty) = d_{33} U (M_1 + m/2) / (M_1 + M_2 + m)$$

$$\xi_1(\infty) + \xi_2(\infty) = d_{33} U$$

here m, M_1, M_2 are the masses of the piezodrive and loads. For the PZT longitudinal drive at $m \rightarrow 0$ at $d_{33} = 0.4 \text{ nm/V}$, $U = 100 \text{ V}$, $M_1 = 0.6 \text{ kg}$ and $M_2 = 2.4 \text{ kg}$ we obtain the parameters $\xi_1(\infty) = 32 \text{ nm}$, $\xi_2(\infty) = 8 \text{ nm}$, $\xi_1(\infty) + \xi_2(\infty) = 40 \text{ nm}$.

The static displacements of the shear piezodrive are determined in the form

$$\xi_1(\infty) = d_{15} U (b/\delta) (M_2 + m/2) / (M_1 + M_2 + m)$$

$$\xi_2(\infty) = d_{15} U (b/\delta) (M_1 + m/2) / (M_1 + M_2 + m)$$

$$\xi_1(\infty) + \xi_2(\infty) = d_{15} (b/\delta) U$$

here m, M_1, M_2 are the masses of the piezodrive and loads. For the PZT shear piezodrive at $d_{15} = 0.5 \text{ nm/V}$, $b = 10 \text{ mm}$, $\delta = 1 \text{ mm}$, $U = 100 \text{ V}$, $M_1 = 0.6 \text{ kg}$ and $M_2 = 2.4 \text{ kg}$ we obtain the parameters $\xi_1(\infty) = 400 \text{ nm}$, $\xi_2(\infty) = 100 \text{ nm}$, $\xi_1(\infty) + \xi_2(\infty) = 500 \text{ nm}$.

The static displacements of the transverse piezodrive are obtained

$$\xi_1(\infty) = d_{15} U (b/\delta) (M_2 + m/2) / (M_1 + M_2 + m),$$

$$\xi_2(\infty) = d_{15} U (b/\delta) (M_1 + m/2) / (M_1 + M_2 + m),$$

$$\xi_1(\infty) + \xi_2(\infty) = d_{15} (b/\delta) U,$$

here m, M_1, M_2 are the masses of the piezodrive and loads. For the PZT transverse piezodrive at $m \rightarrow 0$ at $d_{31} = 0.2 \text{ nm/V}$, $h = 10 \text{ mm}$, $\delta = 1 \text{ mm}$, $U = 100 \text{ V}$, $M_1 = 0.6 \text{ kg}$ and $M_2 = 2.4 \text{ kg}$ we obtain the parameters

$$\xi_1(\infty) = 160 \text{ nm}, \xi_2(\infty) = 40 \text{ nm}, \xi_1(\infty) + \xi_2(\infty) = 200 \text{ nm}.$$

For the piezodrive, the electromechanical coupling coefficient has the form

$$k_{mi} = d_{mi} / \sqrt{S_{ij}^E \varepsilon_{mk}^T}$$

The structural diagram of the piezodrive at distributed parameters and voltage control with the negative feedback has the form Figure 2

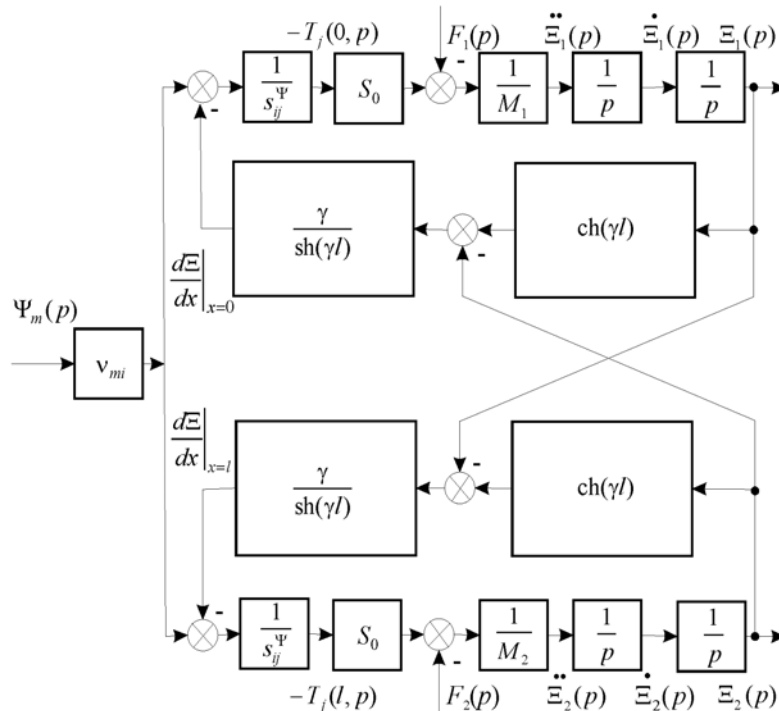


Figure 1: Structural diagram of piezodrive for nanotechnology, medical science and precision engineering

$$U_{\Xi_a}(p) = \frac{d_{mi} S_0 R_i}{\delta S_{ij}^E} \dot{\Xi}_a(p), \quad a = 1, 2$$

For the structural diagram of the piezodrive at one rigidly fixed face we have structural diagram with lumped parameters at voltage control on Figure 3.

The coefficient k_d equal coefficient k_r .

$$k_d = k_r = \frac{d_{mi} S_0}{\delta S_{ij}^E},$$

Here $\psi = E, D$ upper indexes:

E - at voltage control, D - at current control.

We have a structural diagram of the piezodrive with lumped parameters at current control on Figure 4.

The structural diagrams of the piezodrive are used for decision nano mechatronics systems in nanotechnology, medical science, and precision engineering.

Conclusion

The structural diagrams of the piezodrive at distributed and lumped parameters are determined for decision nano mechatronics system in nanotechnology, medical science and precision engineering. The structural diagrams and

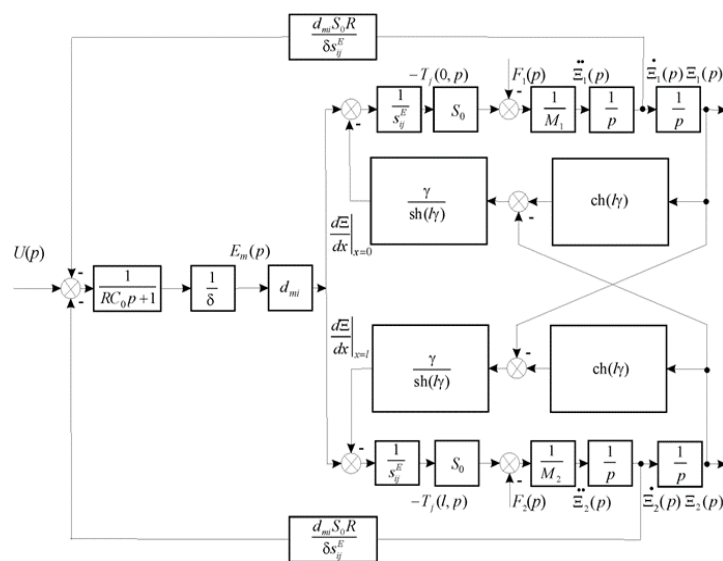


Figure 2: Structural diagram of piezodrive for voltage control at distributed parameters.

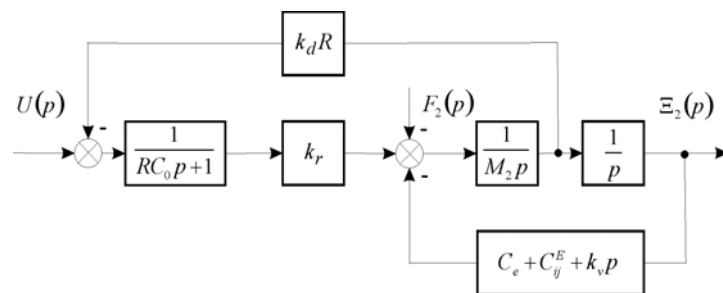


Figure 3: Structural diagram of piezodrive for voltage control at lumped parameters.

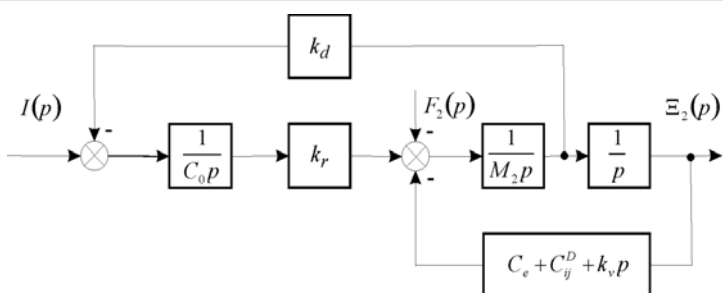


Figure 4: Structural diagram of piezodrive for current control at lumped parameters.

matrix transfer function of the piezodrive are used in nano mechatronics system. The numerical parameters of the piezodrives are determined.

References

- Zhou X, Wu S, Wang X, et al. Review on piezoelectric actuators: materials, classifications, applications, and recent trends. *Front Mech Eng*. 2024;19(1):6. Available from: <https://doi.org/10.1007/s11465-023-0772-0>.
- Uchino K. Piezoelectric actuator and ultrasonic motors. Boston (MA): Kluwer Academic Publishers; 1997. 350 p.
- Afonin SM. Absolute stability conditions for a system controlling the deformation of an electromagnetoelastic transducer. *Dokl Math*. 2006;74(3):943–948. Available from: <https://doi.org/10.1134/S1064562406060391>.
- Afonin SM. Generalized parametric structural model of a compound electromagnetoelastic transducer. *Dokl Phys*. 2005;50(2):77–82. Available from: <https://doi.org/10.1134/1.1881716>.
- Afonin SM. Structural parametric model of a piezoelectric nanodisplacement transducer. *Dokl Phys*. 2008;53(3):137–143. Available from: <https://doi.org/10.1134/S1028335808030063>.
- Afonin SM. Solution of the wave equation for the control of an electromagnetoelastic transducer. *Dokl Math*. 2006;73(2):307–313. Available from: <https://doi.org/10.1134/S1064562406020402>.
- Afonin SM. Erratum to: Solution of the wave equation for the control of an electromagnetoelastic transducer. *Dokl Math*. 2025;111(1):91. Available from: <https://doi.org/10.1134/S1064562425010016>.
- Cady WG. Piezoelectricity: an introduction to the theory and applications of electromechanical phenomena in crystals. New York (NY): McGraw-Hill Book Company; 1946. 806 p.
- Mason W, editor. Physical acoustics: principles and methods. Vol. 1, Part A, Methods and devices. New York (NY): Academic Press; 1964. 515 p.
- Zhao C, Li Z, Xu F, Zhang H, Sun F, Jin J, Zhang X, Yang L. Design of a novel three-degree-of-freedom piezoelectric-driven micro-positioning platform with compact structure. *Actuators*. 2024;13(7):248. Available from: <https://doi.org/10.3390/act13070248>.
- Zwillinger D. Handbook of differential equations. Boston (MA): Academic Press; 1989. 673 p.
- Afonin SM. A generalized structural-parametric model of an electromagnetoelastic converter for nano- and micrometric movement control systems: III. Transformation parametric structural circuits of an electromagnetoelastic converter for nano- and micrometric movement control systems. *J Comput Syst Sci Int*. 2006;45(2):317–325. Available from: <https://doi.org/10.1134/S106423070602016X>.
- Afonin SM. Generalized structural-parametric model of an electromagnetoelastic converter for control systems of nano- and micrometric movements: IV. Investigation and calculation of characteristics of step-piezodrive of nano- and micrometric characters. *J Comput Syst Sci Int*. 2006;45(6):1006–1013. Available from: <https://doi.org/10.1134/S1064230706060153>.
- Afonin SM. Decision wave equation and block diagram of electromagnetoelastic actuator nano- and microdisplacement for communications systems. *Int J Inf Commun Sci*. 2016;1(2):22–29. Available from: <https://doi.org/10.11648/j.ijics.20160102.12>.
- Afonin SM. Structural-parametric model and transfer functions of electroelastic actuator for nano- and microdisplacement. In: Parinov IA, editor. Piezoelectrics and nanomaterials: fundamentals, developments and applications. New York (NY): Nova Science; 2015. p. 225–242.
- Afonin SM. A structural-parametric model of electroelastic actuator for nano- and microdisplacement of mechatronic system. In: Bartul Z, Trenor J, editors. Advances in nanotechnology. Vol. 19. New York (NY): Nova Science; 2017. p. 259–284.
- Afonin SM. Structural scheme of electroelastic engine micro and nano displacement for applied bionics and biomechanics. *MOJ Appl Bionics Biomech*. 2025;9(1):1–4. Available from: <https://doi.org/10.15406/mojab.2025.09.00216>.
- Nalwa HS, editor. Encyclopedia of nanoscience and nanotechnology. USA: American Scientific Publishers; 2019. 25 vols.
- Afonin SM. Electromagnetoelastic nano- and microactuators for mechatronic systems. *Russ Eng Res*. 2018;38(12):938–944. Available from: <https://doi.org/10.3103/S1068798X18120328>.
- Afonin SM. Nano- and micro-scale piezomotors. *Russ Eng Res*. 2012;32(7–8):519–522. Available from: <https://doi.org/10.3103/S1068798X12060032>.
- Afonin SM. Elastic compliances and mechanical and adjusting characteristics of composite piezoelectric transducers. *Mech Solids*. 2007;42(1):43–49. Available from: <https://doi.org/10.3103/S0025654407010062>.
- Afonin SM. Stability of strain control systems of nano- and microdisplacement piezotransducers. *Mech Solids*. 2014;49(2):196–207. Available from: <https://doi.org/10.3103/S0025654414020095>.
- Afonin SM. Structural-parametric model electromagnetoelastic actuator nanodisplacement for mechatronics. *Int J Phys*. 2017;5(1):9–15. Available from: <https://doi.org/10.12691/ijp-5-1-27>.
- Afonin SM. Structural-parametric model multilayer electromagnetoelastic actuator for nanomechanics. *Int J Phys*. 2019;7(2):50–57. Available from: <https://doi.org/10.12691/ijp-7-2-3>.
- Afonin SM. Calculation deformation of an engine for nano biomedical research. *Int J Biomed Res*. 2021;1(5):1–4. Available from: <https://doi.org/10.31579/IJBR-2021/028>.
- Afonin SM. Precision engine for nanobiomedical research. *Biomed Res Clin Rev*. 2021;3(4):1–5. Available from: <https://doi.org/10.31579/2692-9406/051>.
- Afonin SM. Solution wave equation and parametric structural schematic diagrams of electromagnetoelastic actuators nano- and microdisplacement. *Int J Math Anal Appl*. 2016;3(4):31–38.
- Afonin SM. Structural-parametric model of electromagnetoelastic actuator for nanomechanics. *Actuators*. 2018;7(1):6. Available from: <https://doi.org/10.3390/act7010006>.
- Afonin SM. Structural-parametric model and diagram of a multilayer electromagnetoelastic actuator for nanomechanics. *Actuators*. 2019;8(3):52. Available from: <https://doi.org/10.3390/act8030052>.
- Afonin SM. Structural-parametric models and transfer functions of electromagnetoelastic actuators nano- and microdisplacement for mechatronic systems. *Int J Theor Appl Math*. 2016;2(2):52–59. Available from: <https://doi.org/10.11648/j.ijtam.20160202.15>.
- Afonin SM. Design static and dynamic characteristics of a piezoelectric nanomicrotransducer. *Mech Solids*. 2010;45(1):123–132. Available from: <https://doi.org/10.3103/S0025654410010152>.
- Afonin SM. Electromagnetoelastic actuator for nanomechanics. *Glob J Res Eng A Mech Eng*. 2018;18(2):19–23. Available from: <https://doi.org/10.17406/GJRE>.
- Afonin SM. Multilayer electromagnetoelastic actuator for robotics systems of nanotechnology. In: Proceedings of the 2018 IEEE Conference EIConRus; 2018. p. 1698–1701. Available from: <https://doi.org/10.1109/EIConRus.2018.8317432>.
- Afonin SM. A block diagram of electromagnetoelastic actuator nanodisplacement for communications systems. *Trans Netw Commun*. 2018;6(3):1–9. Available from: <https://doi.org/10.14738/tnc.63.4641>.
- Afonin SM. Decision matrix equation and block diagram of multilayer electromagnetoelastic actuator micro and nanodisplacement for communications systems. *Trans Netw Commun*. 2019;7(3):11–21. Available from: <https://doi.org/10.14738/tnc.73.6564>.

36. Afonin SM. Condition absolute stability control system of electromagnetoelastic actuator for communication equipment. *Trans Netw Commun.* 2020;8(1):8-15. Available from: <https://doi.org/10.14738/tnc.81.7775>.
37. Afonin SM. A block diagram of electromagnetoelastic actuator for control systems in nanoscience and nanotechnology. *Trans Mach Learn Artif Intell.* 2020;8(4):23-33. Available from: <https://doi.org/10.14738/tmlai.84.8476>.
38. Afonin SM. Optimal control of a multilayer electroelastic engine with a longitudinal piezoelectric effect for nanomechatronics systems. *Appl Syst Innov.* 2020;3(4):53. Available from: <https://doi.org/10.3390/asi3040053>.
39. Afonin SM. Coded control of a sectional electroelastic engine for nanomechatronics systems. *Appl Syst Innov.* 2021;4(3):47. Available from: <https://doi.org/10.3390/asi4030047>.
40. Afonin SM. Structural scheme actuator for nano research. *COJ Rev Res.* 2020;2(5):1-3. Available from: <https://doi.org/10.31031/COJRR.2020.02.000548>.
41. Afonin SM. Structural-parametric model electroelastic actuator nano- and microdisplacement of mechatronics systems for nanotechnology and ecology research. *MOJ Ecol Environ Sci.* 2018;3(5):306-309. Available from: <https://doi.org/10.15406/mojes.2018.03.00104>.
42. Afonin SM. Deformation of electromagnetoelastic actuator for nano robotics system. *Int Robot Autom J.* 2020;6(2):84-86. Available from: <https://doi.org/10.15406/iratj.2020.06.00205>.
43. Afonin SM. Correction of characteristics compound longitudinal piezodrive at elastic inertial load for nanorobotics research. *Int Robot Autom J.* 2024;10(3):103-106. Available from: <https://doi.org/10.15406/iratj.2024.10.00291>.
44. Afonin SM. A multi-layer electro elastic drive for micro and nano robotics. *Int Robot Autom J.* 2024;10(2):73-76. Available from: <https://doi.org/10.15406/iratj.2024.10.00286>.
45. Afonin SM. Electromagnetoelastic actuator for large telescopes. *Aeronaut Aersp Open Access J.* 2018;2(5):270-272. Available from: <https://doi.org/10.15406/aaaj.2018.02.00060>.
46. Afonin SM. Condition absolute stability of control system with electroelastic actuator for nano bioengineering and microsurgery. *Surg Case Stud Open Access J.* 2019;3(3):307-309. Available from: <https://doi.org/10.32474/SCSOAJ.2019.03.000165>.
47. Afonin SM. Piezo actuators for nanomedicine research. *MOJ Appl Bionics Biomech.* 2019;3(2):56-57. Available from: <https://doi.org/10.15406/mojabb.2019.03.00099>.
48. Afonin SM. Step piezoengine for nano and micro bionics. *MOJ Appl Bionics Biomech.* 2026;10(1):22-24. Available from: <https://doi.org/10.15406/mojabb.2026.10.00238>.
49. Afonin SM. Multilayer piezo engine for nanomedicine research. *MOJ Appl Bionics Biomech.* 2020;4(2):30-31. Available from: <https://doi.org/10.15406/mojabb.2020.04.00128>.
50. Afonin SM. Structural scheme of electromagnetoelastic actuator for nano biomechanics. *MOJ Appl Bionics Biomech.* 2021;5(2):36-39. Available from: <https://doi.org/10.15406/mojabb.2021.05.00154>.
51. Afonin SM. Parallel and coded control of multi layered longitudinal piezo engine for nano biomedical research. *MOJ Appl Bionics Biomech.* 2024;8(1):62-65. Available from: <https://doi.org/10.15406/mojabb.2024.08.00210>.
52. Afonin SM. DAC electro elastic engine for nanomedicine. *MOJ Appl Bionics Biomech.* 2024;8(1):38-40. Available from: <https://doi.org/10.15406/mojabb.2024.08.00205>.
53. Afonin SM. Multilayer engine for microsurgery and nano biomedicine. *Surg Case Stud Open Access J.* 2020;4(4):423-425. Available from: <https://doi.org/10.32474/SCSOAJ.2020.04.000193>.
54. Afonin SM. A structural-parametric model of a multilayer electroelastic actuator for mechatronics and nanotechnology. In: Bartul Z, Trenor J, editors. *Advances in nanotechnology.* Vol. 22. New York (NY): Nova Science; 2019. p. 169-186.
55. Afonin SM. Electroelastic digital-to-analog converter actuator nano and microdisplacement for nanotechnology. In: Bartul Z, Trenor J, editors. *Advances in nanotechnology.* Vol. 24. New York (NY): Nova Science; 2020. p. 205-218.
56. Afonin SM. Characteristics of an electroelastic actuator nano- and microdisplacement for nanotechnology. In: Bartul Z, Trenor J, editors. *Advances in nanotechnology.* Vol. 25. New York (NY): Nova Science; 2021. p. 251-266. Available from: <https://doi.org/10.52305/TANO4731>.
57. Afonin SM. An absolute stability of nanomechatronics system with electroelastic actuator. In: Bartul Z, Trenor J, editors. *Advances in nanotechnology.* Vol. 27. New York (NY): Nova Science; 2022. p. 183-198. Available from: <https://doi.org/10.52305/YOPZ1532>.
58. Afonin SM. Rigidity of a multilayer piezoelectric actuator for the nano and micro range. *Russ Eng Res.* 2021;41(4):285-288. Available from: <https://doi.org/10.3103/S1068798X21040031>.
59. Afonin SM. Structural scheme of an electromagnetoelastic actuator for nanotechnology research. In: Parinov IA, Chang SH, Putri EP, editors. *Physics and mechanics of new materials and their applications. PHENMA 2023. Springer Proceedings in Materials.* Vol. 41. Cham: Springer; 2024. p. 486-501. Available from: https://doi.org/10.1007/978-3-031-52239-0_45.
60. Afonin SM. Structural model and scheme of a multilayer electromagnetoelastic actuator for nanotechnology. In: Parinov IA, Chang SH, Sohani N, Gupta VK, editors. *Physics and mechanics of new materials and their applications. PHENMA 2024. Springer Proceedings in Materials.* Vol. 3. Cham: Springer; 2025. p. 527-544. Available from: https://doi.org/10.1007/978-3-031-87677-6_45.
61. Afonin SM. Structural scheme of electroelastic engine micro and nano displacement for applied bionics and biomechanics. *MOJ Appl Bionics Biomech.* 2025;9(1):1-4. Available from: <https://doi.org/10.15406/mojab.2025.09.00216>.
62. Afonin SM. Multilayer and sectional nano piezo engine for applied bionics and biomechanics. *MOJ Appl Bionics Biomech.* 2025;9(1):59-62. Available from: <https://doi.org/10.15406/mojabb.2025.09.00226>.
63. Shevtsov SN, Soloviev AN, Parinov IA, Cherpakov AV, Chebanenko VA. *Piezoelectric actuators and generators for energy harvesting: research and development.* Cham: Springer; 2018. 182 p. Available from: <https://doi.org/10.1007/978-3-319-75629-5>.
64. Akpinar M, Uzun B, Yayli MO. Dynamics of a piezoelectric restrained nanowire in an elastic matrix. *Mech Solids.* 2024;59(5):2936-2959. Available from: <https://doi.org/10.1134/S0025654424604713>.
65. Bhushan B, editor. *Springer handbook of nanotechnology.* Germany: Springer; 2017. 1500 p. Available from: <https://doi.org/10.1007/978-3-662-54357-3>.